RFPC-SMA33-FN	CUSTOMER PRODUCT SPECIFICATION SHEET	RoHS Compliant

RFPC-SMA33-FN: RP SMA Bulkhead Jack, With O-ring, Edge Mount Connector, IP68/69K, 6GHz

Material and Plating:

Insulator A: Teflon
Insulator B: Teflon
Body: Brass, Gold Plated
Pin: Phosphor Bronze, Gold Plated
Gasket A: Silicone rubber, Color: Red
Gasket B: Silicone rubber, Color: Red
O-Ring: Silicone rubber, Color: Red
Barrel: Brass, Gold Plated

Washer: Brass, Gold Plated

Nut: Brass, Gold Plated

Environmental:
A. Rated to:
i. IP6x - Dust tight - no particle ingress.
ii. IPx8 Waterproof for 48 hours at 1 meter underwater.
iii. IPx9K Water spray, 14-16L per minute, at 8,000 ~ 10,000 kPa, at 100-150mm distance for 30 seconds.

Notes:
1. Working Frequency Range: DC-6GHz.
2. Operating Temperature: -65°C to +165°C.
3. Impedance: 50 Ohm
4. VSWR: 1.5 Max.
5. Recommended PCB Thickness: 0.80mm or 1.6mm. Other PCB thickness available on request

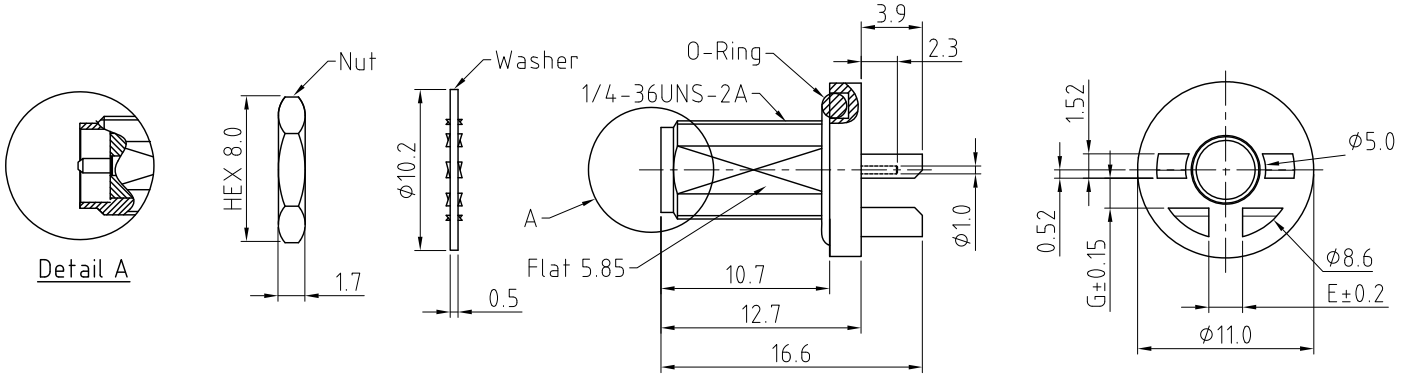



Recommended Mounting Hole

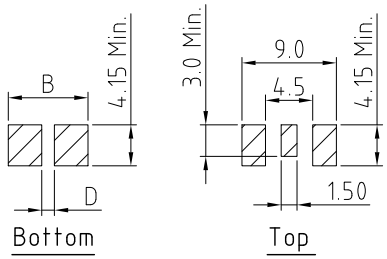

Recommended Foot Print
Tolerance: ±0.05

Dim B	Dim D	Dim E	Dim G	Recommended PCB thickness
8.4	3.7	4.0	0.95	0.80
7.6	1.2	1.55	1.86	1.60

HOW TO ORDER

RFPC - SMA33 - FN - XXX - X

DIMENSION G OPTIONS:
095 = 0.95MM, FOR 0.80MM PCB THICKNESS
186 = 1.86MM, FOR 1.60MM PCB THICKNESS

WASHER AND NUT OPTIONS:
BLANK = SEPARATELY PACKED (STANDARD)
A = ALL ASSEMBLED WITH CONNECTOR



IP RATED EVEN WHEN UNMATED

REV.	DATE & DRN	
15	29/07/'24	- CC RELEASE

Scale: NTS	THIRD ANGLE	Unstated Tolerances: .X ±0.2, .XX ±0.2, .XXX ±0.2, ANGLES N/A	IP Rated RF Products	Type: RFPC-SMA33-FN
Drawn: CC			www.gradconn.com	RFPC-SMA33-FN
App'd: XXX	Title SMA PCB Connector			Drawing Number:
Date: 29 JUL. '24	Revision: 1.0	Unit: mm		Sheet 1 of 1

© THIS DRAWING IS CONFIDENTIAL AND MUST NOT BE COPIED OR DISCLOSED WITHOUT WRITTEN CONSENT

Drawing © E and O E