



CAB623RF: SMA STRAIGHT PLUG + BNC STRAIGHT PLUG + RG174 CABLE, 3GHz

SPECIFICATIONS:

- 1. SMA STRAIGHT PLUG, P/N: RFCT-SMA027-M74.
- 2. RG174 COAXIAL CABLE, COLOR: BLACK.
- 3. BNC STRAIGHT PLUG, P/N: RFCT-BNC014-M74.

NOTES:

- 1. WORKING FREQUENCY RANGE: DC-3GHz.
- 2. OPERATING TEMPERATURE: -20°C TO +80°C.
- 3. IMPEDANCE: 50 OHM.

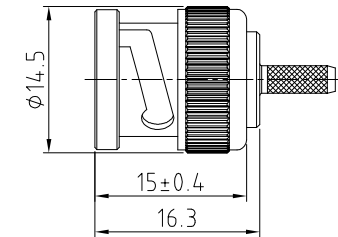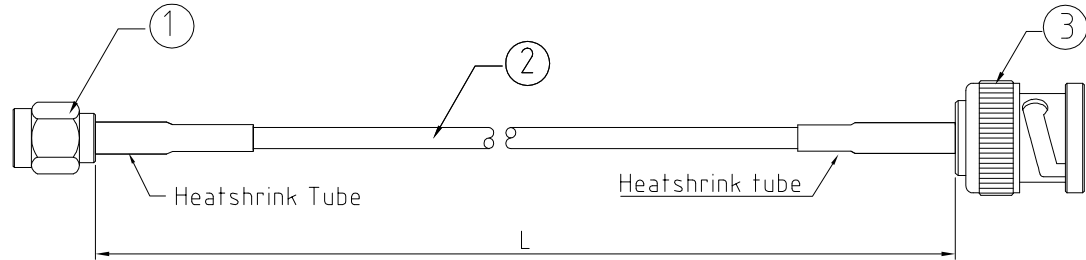

BNC DETAIL DRAWING

HOW TO ORDER

CAB623RF - X X X X - 1

"L" LENGTH IN MM

CABLE SIZE:

eg: 100MM = 0100

1 = RG174 CABLE, COLOR: BLACK.

(MIN. = 0050, MAX. = 2000,
STANDARD = 0100, 0150, 0200)

Tolerance: 50-200mm: ±5mm.
201-500mm: ±7mm.
501-999mm: ±10mm.
≥1000mm: ±(Lx0.02)mm.

REV. DATE & DRN
10/08/07/24 - NYW RELEASE

Scale: NTS	THIRD ANGLE	Unstated Tolerances: .X ±0.2 .XX ±0.2 .XXX ±0.2 ANGLES N/A	Material SEE NOTE
Drawn: NYW			
App'd: XXX	Title CABLE ASSEMBLY	NOT TO SCALE	
Date: 8 JAN. '24	Revision: 1.0	Unit: mm	



THIS DRAWING IS CONFIDENTIAL AND MUST NOT BE COPIED OR DISCLOSED WITHOUT WRITTEN CONSENT

Drawing Number: CAB623RF	
Sheet 1	of 1
Drawing	E and O E